

**Gross Power**  
97 kW (130 HP) at 2,000 rpm

**Net Power**  
95 kW (127 HP) at 2,000 rpm

**Bucket Capacity**  
0.52 ~ 0.71m<sup>3</sup>

**Operating Weight**  
14,325 kg / 31,580 lb

# HX140 L

With Tier 3 / Stage IIIA Engine Installed

**HYUNDAI CONSTRUCTION EQUIPMENT**

Head Office(Sales Office)  
3F, Bundang First Tower, 55 Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13591, Korea

PLEASE CONTACT





# RULE THE GROUND

## HX140 L

HX Series exceeds customer's expectation!  
Become a true leader on the ground with HCE's HX series.

### WORK MAX, WORTH MAX

- IPC (Intelligent Power Control) **NEW**
- Attachment Flow Control **Option**
- New Variable Power Control
- Fuel Rate Information
- ECO Gauge
- New Cooling System with Increased Air Flow
- Enlarged Air Inlet with Grill Cover

### MORE RELIABLE, MORE SUSTAINABLE

- Durable Cooling Module
- Reinforced Pin, Bush, and Polymer Shim
- Reinforced Durability of Upper and Lower Frame
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses

### INFOTAINMENT FRONTIER

- Key On Init Work Mode **NEW**
- Proportional Auxiliary Hydraulic System **Option**
- Quick Coupler Button **Option**
- New Front Side Air-conditioning System
- Intelligent and Wide Cluster
- New Air Conditioning System
- Audio System

### MODERN COMFORT, SIMPLE AND SAFE SOLUTION

- Rear and Mirror view Camera **NEW** **Option**
- AAVM (Advanced Around View Monitoring) Camera System **Option**
- Hi MATE (Remote Management System) **Option**
- Swing Lock System **Option**
- Fine Swing Control **Option**
- ROPS / FOG Cabin **Option**
- Emergency Engine Stop Switch



\* Photo may include optional equipment.



15% increased greater screen from 7 to 8 inch is applied in HX Series. More functions and better resolution are available with adding premium options.

### IPC (Intelligent Power Control)

NEW

HX Series adopts the upgraded IPC system. It is able to optimize pump flow rate and power at the various working condition through the individual pump control. Furthermore, optimized design of MCV and pipe line minimizes energy loss such as conflux and throttle loss.



### Attachment Flow Control Option

HX Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (ten breaker types and ten crusher types), enabling various operations matching the site environments.



### Eco Gauge

Eco gauge enables economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed is displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.



### Fuel Rate Information



### New Cooling System with Increased Air Flow

With the three-floor vertically placed cooling module improving air inflow, HX Series provides excellent cooling performance by increasing heat dissipation and can be easily cleaned.



### Enlarged Air Inlet with Grill Cover

Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.



# WORK MAX, WORTH MAX

### Fuel Efficient System Allows Great Performance

HX Series has an eco-friendly, high-performance engine which ensures both excellent fuel efficiency and high power. With outstanding operating performance proven by rigorous tests at various work sites, it will satisfy any customer's needs.

### New Variable Power Control

HX Series minimizes equipment input and output control signals to improve fuel efficiency. Its three-stage power mode ensures the highest performance in any operating environment.



\* P(power) mode : Maximizes speed and power of the equipment for heavy load work.



\* S(standard) mode : Optimizes performance and fuel efficiency of the equipment for general load work.



\* E(economy) mode : Improves the control system for light load work.



**BETTER FUEL-EFFICIENCY**  
(Compared to 9 Series)

Truck Loading  
**12%**

Leveling  
**12%**

Daily Fuel Efficiency  
**12%**

\* Photo may include optional equipment.





# MORE RELIABLE, MORE SUSTAINABLE

## New Exterior Design for Robustness and Safety

The true value of HX Series lies in its durability. The robust frame structure and the attachments show the real value of HX Series in tough working environments and promise higher productivity.



Photo may include optional equipment.



We make the best performance  
in rough working conditions  
without any unsureness with  
trustworthy HX140L.



## Durable Cooling Module

HX Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.

## Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of HX Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



## Reinforced Pins, Bushing, and Polymer Shims

HX Series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes, and polymer shims, supporting the highest performance with invariable durability.



## Wear Resistant Cover Plate

A wear-resistant cover plate is installed at the end of the arm to minimize abrasion on the connector between the arm and the bucket. Vibration reduction of buckets enables more stable operation even in high-load work.

## Hi-grade (High-pressure) Hoses

HX Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.



13%

CABIN SPACE FOR DRIVERS  
INCREASED BY  
(compared to the previous model)

310mm  
340mm



# INFOTAINMENT FRONTIER

## Improved Instrument Panel for Easier Monitoring

Many electronic functions are concentrated in the most convenient spot for operators to improve work efficiency. The highly-advanced infotainment system, a product of HCE's intensive information technology development, enables both productivity and comfort while working! HX Series is designed with the operator in mind.

\* Photo may include optional equipment.

## New Front Side Air-conditioning System

The ventilation is designed for both warm and cool air reaching to operator's faces. It could helps operators create more neat and enjoyable atmosphere through indoor air circulation.



## New Audio System

The radio player with a USB-based MP3 player, an integrated Bluetooth hands-free feature, and a built-in microphone allow for phone calls while at work and in transit. The radio player is conveniently located on the right side of the operator to allow for improved access.



## Quick Coupler Button Option

Easy attachment replacement of equipment is available with quick coupler button.



## Key On Init Work Mode NEW

Operator can maintain previously set about attachment mode when starting.



## Proportional Auxiliary Hydraulic System Option

Proportional control switch with better speed control helps operators to enlarge the operation convenience whenever they do time-consuming work.



## Intelligent and Wide Cluster

The 8" capacitive-type display(like smartphone display) of HX Series is delivering excellent legibility. The centralized switches on the display allow convenience of checking the urea level and temperature outside the cabin.



\* The above image is 'Premium type'.





# MODERN COMFORT, SIMPLE AND SAFE SOLUTION

## New Cabin for More Comfort

Low noise, low vibration, and ergonomic design make the cabin space more comfortable and pleasant! With focus on safety and convenience of operators, HX Series allows rapid and safe equipment inspection anytime and anywhere, providing an optimal environment for operators to work.



## Hi MATE

Option

### IT'S CONVENIENT, EASY AND VALUABLE

Hi MATE Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

### WHAT IS BENEFITS



#### Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



#### Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



#### Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geofence boundary, you will get alerts.



## HX140L with advanced technology ensures our safety on a construction site.



HX Series excavators are products of HCE's spirit of initiative, creativity, and strong drive. HCE engineers, who are the best in the industry, have worked tirelessly to offer a zero-defect product. The new HX Series reflects customers' needs in the field gleaned by thorough monitoring.

### Rear and Mirror View Camera

NEW Option


The mirror view camera is installed on right side. The camera helps the operator cover the visual blind spot on the right side mirror.



### AAVM(Advanced Around View Monitoring) Camera System Option

HX-LT3 Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.

- **AAVM**(Advanced Around View Monitoring) : Secure field of vision in all directions by ten views including 3D bird's eye view and 2D/4CH view.
- **IMOD**(Intelligent Moving Object Detection) : Inform when people or dangerous objects are detected within the range of operation(recognition distance : 5 m).

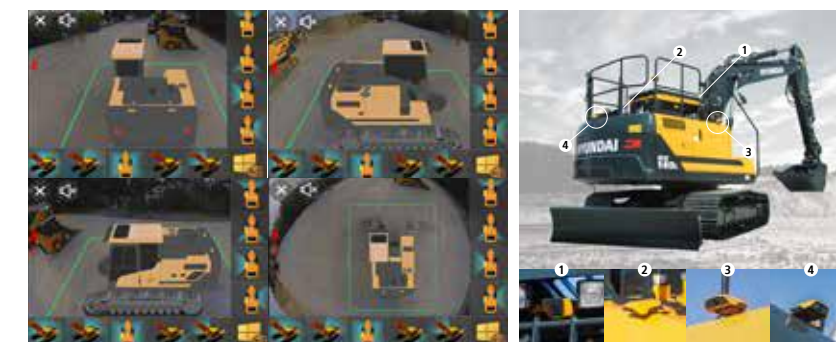

### Swing Lock System Option

Swing lock system is provided to maintain stability when swing movement needs to be limited.

### Fine Swing Control Option

This option enables smooth movement at the start and stop of swing operation. (Cushion Swing).

### ROPS / FOG Cabin Option

The cabin structure of Hyundai HX A Series is using integrally welded low-stress, high strength steel to meet ROPS and FOG certification.

- **ROPS** : Roll-Over Protective Structures ISO 12117-2
- **IMOD** : Falling Object Guard, ISO 10262 Level 2

### Emergency Engine Stop Switch

Manual engine stop switch behind the seat is used for emergency stop. It can be reached from outside of cabin.

\*Photo may include optional equipment.



SPECIFICATIONS

| ENGINE        |   |
|---------------|---|
| Maker / Model | CUMMINS / QSB4.5  |
| Type          | 4-cycle, turbocharged, charge air cooled, electronic controlled diesel engine |
| Gross Power   | 97 kW (130 hp) at 2,000 rpm   |
| Net Power     | 95 kW (127 hp) at 2,000 rpm   |
| Max. Power    | 101 kW (135 hp) at 1,800 rpm  |
| Peak Torque   | 620 N·m (457 lb·ft) at 1,500 rpm  |
| Displacement  | 4.5 ℓ (272 cu in)   |

| HYDRAULIC SYSTEM |  |
|------------------|--|
| MAIN PUMP        |  |
| Type             | Variable displacement tandem axis piston pumps |
| Max. flow        | 2 x 131 ℓ/min (34.6 U.S. gpm)                  |
| PILOT PUMP       |  |
| Type             | Fixed displacement gear pump single stage      |
| Max. flow        | 27 ℓ/min (7.1 U.S. gpm)                        |

| HYDRAULIC MOTORS |   |
|------------------|---|
| Travel           | Variable displacement axial piston motor  |
| Swing            | Two fixed displacement axial piston motor |

| RELIEF VALVE SETTING            |                        |
|---------------------------------|------------------------|
| Implement circuits              | 350 kgf/cm² (4,980psi) |
| Travel                          | 350 kgf/cm² (4,980psi) |
| Power boost (boom, arm, bucket) | 380 kgf/cm² (5,410psi) |
| Swing circuit                   | 280 kgf/cm² (3,990psi) |
| Pilot circuit                   | 40 kgf/cm² (569psi)    |
| Service valve                   | Installed              |

| HYDRAULIC CYLINDERS           |                       |
|-------------------------------|-----------------------|
| No. of cylinder bore X stroke | Boom: 2-Ø105×1,075 mm |
|                               | Arm: 1-Ø115×1,138 mm  |
|                               | Bucket: 1-Ø100×850 mm |
|                               | Blade: 2-100 x 250 mm |

\* Hyundai Bio Hydraulic Oil (HBHO) available

| DRIVES & BRAKES                |                                       |
|--------------------------------|---------------------------------------|
| Drive method                   | Fully hydrostatic type                |
| Drive motor                    | Axial piston motor, in-shoe design    |
| Reduction system               | Planetary reduction gear              |
| Max. drawbar pull              | 12,670 kgf (27,930 lbf)               |
| Max. travel speed (high / low) | 3.4km/hr (2.1mph) / 5.8km/hr (3.6mph) |
| Gradeability                   | 35° (70%)                             |
| Parking brake                  | Multi wet disc                        |

| CONTROL   |  |
|---|--|
| Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation. |  |
| Pilot control   | Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket |
| Traveling and steering  | Two levers with pedals   |
| Engine throttle   | Electric, Dial type  |

| SWING SYSTEM              |   |
|---------------------------|---|
| Swing motor               | Two fixed displacement axial piston motor |
| Swing reduction           | 2-stage planetary                         |
| Swing bearing lubrication | Grease-bathed                             |
| Swing brake               | Multi wet disc                            |
| Swing speed               | 12.4 rpm                                  |

| COOLANT & LUBRICANT CAPACITY      |       |        |
|-----------------------------------|-------|--------|
|                                   | liter | US gal |
| Fuel tank                         | 270   | 71.3   |
| Engine coolant                    | 23    | 6.1    |
| Engine oil                        | 11    | 2.9    |
| Swing device                      | 3.5   | 0.9    |
| Final drive                       | 2.3   | 0.6    |
| Hydraulic system (including tank) | 210   | 55.5   |
| Hydraulic tank                    | 120   | 31.7   |

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

|                                    |              |                 |
|------------------------------------|--------------|-----------------|
| Center Frame                       | X-Leg Type   |                 |
| Track Frame                        | Pentagonal   |                 |
| model                              | HX140L(D) T3 | HX140HW T3      |
| No. of shoes on each side          | 46           | 47              |
| No. of carrier roller on each side | 2 x 1        | 2 x 2           |
| No. of track roller on each side   | 2 x 7        | 2 x 7           |
| No. of rail guard on each side     | 2            | Full Rail Guard |


| OPERATING WEIGHT (APPROXIMATE)   |  |
|--|--|
| Operating weight, including 4,600mm (15' 1") boom, 2,500mm (8' 2") arm, SAE heaped 0.52m³ (0.68 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments. |  |

| Shoes          |               | Operating weight |                 | Ground pressure |
|----------------|---------------|------------------|-----------------|-----------------|
| Type           | Width mm (in) | kg (lb)          |                 | kgf/cm² (psi)   |
| Triple grouser | 500 (20")     | HX140 L          | 14,110 (31,110) | 0.44 (6.26)     |
|                |               | HX140 LD         | 15,015 (33,100) | 0.46 (6.54)     |
|                | 600 (24")     | HX140 L          | 14,325 (31,580) | 0.37 (5.26)     |
|                |               | HX140 LD         | 15,230 (33,580) | 0.39 (5.55)     |
|                | 700 (28")     | HX140 L          | 14,535 (32,040) | 0.32 (4.55)     |
|                |               | HX140 LD         | 15,440 (34,040) | 0.34 (4.84)     |
|                | 800 (32")     | HX140 HW         | 17,085 (37,670) | 0.37 (5.26)     |
|                |               | HX140 HW         | 17,320 (38,180) | 0.33 (4.69)     |

| AIR CONDITIONING SYSTEM   |  |
|---|--|
| The air condition system for the machine contains the fluorinated |  |


DIMENSIONS & WORKING RANGE

| HX140 L / HX140 LD MONO BOOM DIMENSIONS                     |  |
|---|--|
| 4.60 m (15' 1") BOOM and 2.50 m (8' 2"), 3.00 m (9' 0") ARM |  |

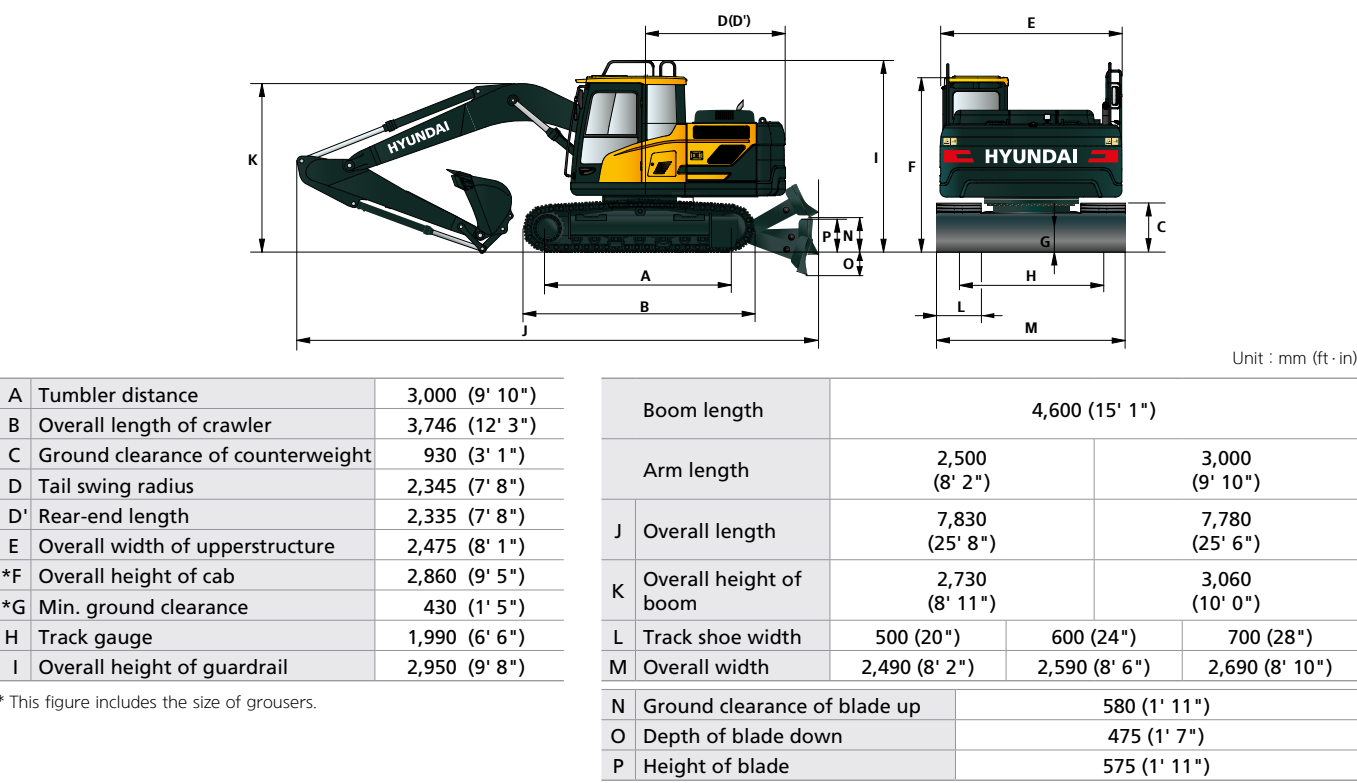

\* This figure includes the size of grousers.

| HX140 L / HX140 LD MONO BOOM WORKING RANGE |  |
|--|--|
|  |  |

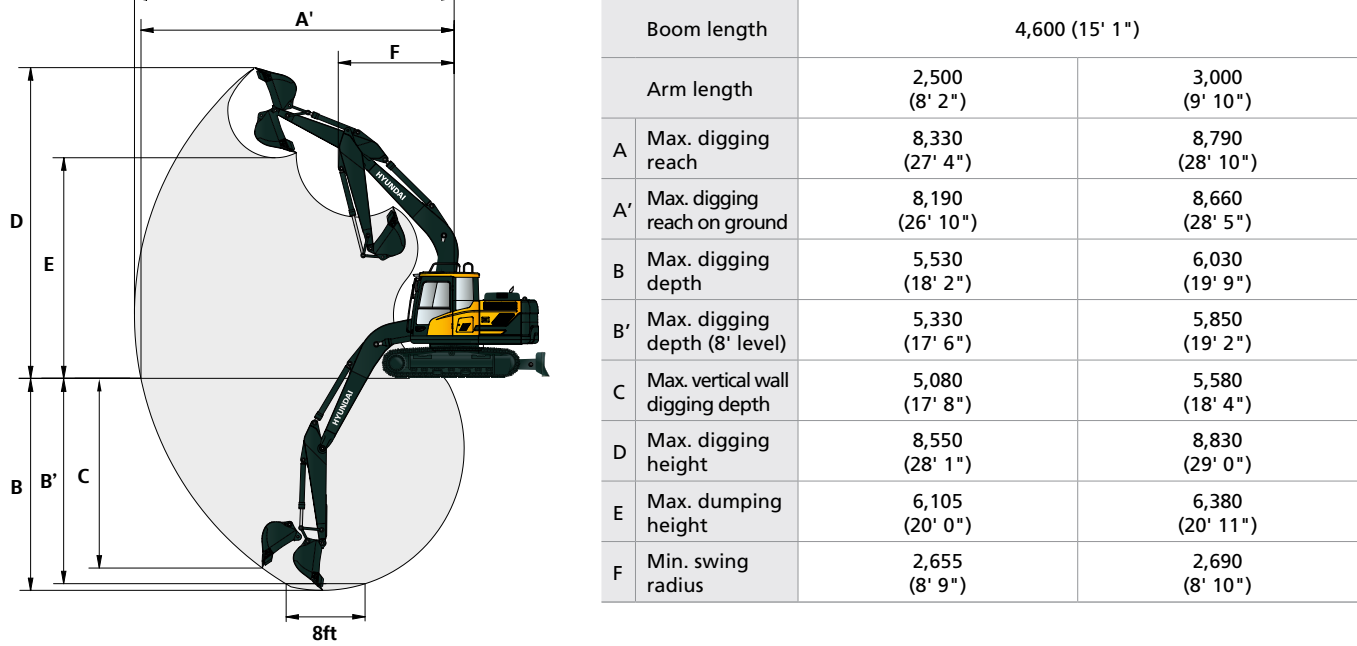




DIMENSIONS & WORKING RANGE

HX140 HW MONO BOOM DIMENSIONS

4.60 m (15' 1") BOOM and 2.50 m (8' 2"), 3.00 m (9' 0") ARM

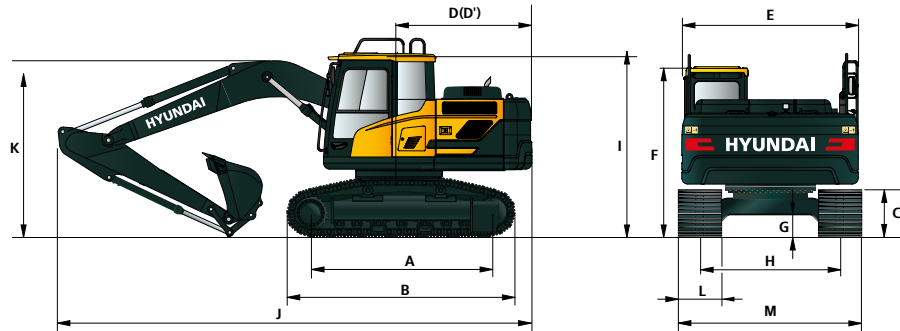

Unit : mm (ft - in)


|    |                                   |                |
|----|-----------------------------------|----------------|
| A  | Tumbler distance                  | 3,030 (9' 11") |
| B  | Overall length of crawler         | 3,820 (12' 6") |
| C  | Ground clearance of counterweight | 1,205 (3' 11") |
| D  | Tail swing radius                 | 2,345 (7' 8")  |
| D' | Rear-end length                   | 2,335 (7' 8")  |
| E  | Overall width of upperstructure   | 2,475 (8' 1")  |
| *F | Overall height of cab             | 3,110 (10' 2") |
| *G | Min. ground clearance             | 600 (2' 0")    |
| H  | Track gauge                       | 2,040 (6' 8")  |
| I  | Overall height of guardrail       | 3,200 (10' 6") |

|             |                        |                |                |
|-------------|------------------------|----------------|----------------|
| Boom length |                        | 4,600 (15' 1") |                |
| Arm length  |                        | 2,500 (8' 2")  | 3,000 (9' 10") |
| J           | Overall length         | 7,830 (25' 8") | 7,780 (25' 6") |
| K           | Overall height of boom | 2,730 (8' 11") | 3,060 (10' 0") |
| L           | Track shoe width       | 700 (28")      | 800 (32")      |
| M           | Overall width          | 2,740 (9' 0")  | 2,840 (9' 4")  |

\* This figure includes the size of grouser.

HX140 HW MONO BOOM WORKING RANGE

Unit : mm (ft - in)

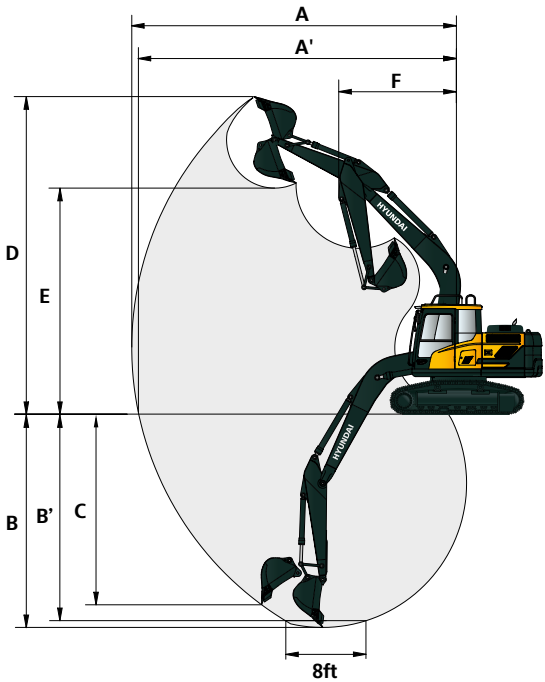











|             |                                  |                 |                 |
|-------------|----------------------------------|-----------------|-----------------|
| Boom length |                                  | 4,600 (15' 1")  |                 |
| Arm length  |                                  | 2,500 (8' 2")   | 3,000 (9' 10")  |
| A           | Max. digging reach               | 8,330 (27' 4")  | 8,790 (28' 10") |
| A'          | Max. digging reach on ground     | 8,190 (26' 10") | 8,660 (28' 5")  |
| B           | Max. digging depth               | 5,530 (18' 2")  | 6,030 (19' 9")  |
| B'          | Max. digging depth (8' level)    | 5,330 (17' 6")  | 5,850 (19' 2")  |
| C           | Max. vertical wall digging depth | 5,080 (17' 8")  | 5,580 (18' 4")  |
| D           | Max. digging height              | 8,550 (28' 1")  | 8,830 (29' 0")  |
| E           | Max. dumping height              | 6,105 (20' 0")  | 6,380 (20' 11") |
| F           | Min. swing radius                | 2,655 (8' 9")   | 2,690 (8' 10")  |

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX140 L T3 MONO BOOM

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 1,900kg counter weight and 600mm(24") Triple grouser shoe without Dozer.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 6.0m                        | kg |   |   |   |   | *3,400  | *3,400  |   |   | *2,420  | *2,420  | 5.42   |
| 19.7ft                      | lb |   |   |   |   | *7,500  | *7,500  |   |   | *5,340  | *5,340  | (17.8) |
| 4.5m                        | kg |   |   |   |   | *3,650  | *3,650  | *3,410  | 2,450   | *2,220  | 2,190   | 6.39   |
| 14.8ft                      | lb |   |   |   |   | *8,050  | *8,050  | *7,520  | 5,400   | *4,890  | 4,830   | (21.0) |
| 3.0m                        | kg |   |   | *6,150  | *6,150  | *4,540  | 3,710   | 3,630   | 2,380   | *2,200  | 1,890   | 6.91   |
| 9.8ft                       | lb |   |   | *13,560   | *13,560   | *10,010   | 8,180   | 8,000   | 5,250   | *4,850  | 4,170   | (22.7) |
| 1.5m                        | kg |   |   | *7,480  | 6,240   | 5,480   | 3,460   | 3,510   | 2,280   | *2,310  | 1,770   | 7.07   |
| 4.9ft                       | lb |   |   | *16,490   | 13,760  | 12,080  | 7,630   | 7,740   | 5,030   | *5,090  | 3,900   | (23.2) |
| 0.0m                        | kg |   |   | *6,420  | 5,930   | 5,270   | 3,270   | 3,420   | 2,190   | *2,570  | 1,800   | 6.91   |
| 0.0ft                       | lb |   |   | *14,150   | 13,070  | 11,620  | 7,210   | 7,540   | 4,830   | *5,670  | 3,970   | (22.7) |
| -1.5m                       | kg | *4,660  | *4,660  | *9,760  | 5,890   | 5,190   | 3,200   | 3,390   | 2,160   | 3,110   | 2,000   | 6.38   |
| -4.9ft                      | lb | *10,270   | *10,270   | *21,520   | 12,990  | 11,440  | 7,050   | 7,470   | 4,760   | 6,860   | 4,410   | (20.9) |
| -3.0m                       | kg | *8,690  | *8,690  | *8,890  | 5,990   | 5,240   | 3,250   |   |   | 4,010   | 2,550   | 5.40   |
| -9.8ft                      | lb | *19,160   | *19,160   | *19,600   | 13,210  | 11,550  | 7,170   |   |   | 8,840   | 5,620   | (17.7) |


4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 1,900kg counter weight and 600mm(24") Triple grouser shoe with Dozer up.

| Lift point height<br>m (ft) |    | Lift-point radius |         |              |         |               |        |               |       | At max. reach |        |        |
|-----------------------------|----|-------------------|---------|--------------|---------|---------------|--------|---------------|-------|---------------|--------|--------|
|                             |    | 1.5m (4.9ft)      |         | 3.0m (9.8ft) |         | 4.5m (14.8ft) |        | 6.0m (19.7ft) |       | Capacity      |        | Reach  |
|                             |    |                   |         |              |         |               |        |               |       |               |        | m (ft) |
| 6.0m                        | kg |                   |         |              |         | *3,400        | *3,400 |               |       | *2,410        | *2,410 | 5.44   |
| 19.7ft                      | lb |                   |         |              |         | *7,500        | *7,500 |               |       | *5,310        | *5,310 | (17.8) |
| 4.5m                        | kg |                   |         |              |         | *3,660        | *3,660 | *3,430        | 2,790 | *2,220        | *2,220 | 6.41   |
| 14.8ft                      | lb |                   |         |              |         | *8,070        | *8,070 | *7,560        | 6,150 | *4,890        | *4,890 | (21.0) |
| 3.0m                        | kg |                   |         | *6,200       | *6,200  | *4,560        | 4,220  | 3,650         | 2,720 | *2,200        | 2,160  | 6.92   |
| 9.8ft                       | lb |                   |         | *13,670      | *13,670 | *10,050       | 9,300  | 8,050         | 6,000 | *4,850        | 4,760  | (22.7) |
| 1.5m                        | kg |                   |         | *7,380       | 7,260   | 5,510         | 3,960  | 3,540         | 2,620 | *2,310        | 2,040  | 7.07   |
| 4.9ft                       | lb |                   |         | *16,270      | 16,010  | 12,150        | 8,730  | 7,800         | 5,780 | *5,090        | 4,500  | (23.2) |
| 0.0m                        | kg |                   |         | *6,450       | *6,450  | 5,310         | 3,780  | 3,440         | 2,530 | *2,580        | 2,080  | 6.90   |
| 0.0ft                       | lb |                   |         | *14,220      | *14,220 | 11,710        | 8,330  | 7,580         | 5,580 | *5,690        | 4,590  | (22.6) |
| -1.5m                       | kg | *4,710            | *4,710  | *9,830       | 6,900   | 5,230         | 3,710  | 3,410         | 2,500 | *3,120        | 2,310  | 6.37   |
| -4.9ft                      | lb | *10,380           | *10,380 | *21,670      | 15,210  | 11,530        | 8,180  | 7,520         | 5,510 | *6,880        | 5,090  | (20.9) |
| -3.0m                       | kg | *8,770            | *8,770  | *8,860       | 7,010   | 5,280         | 3,760  |               |       | 4,060         | 2,960  | 5.38   |
| -9.8ft                      | lb | *19,330           | *19,330 | *19,530      | 15,450  | 11,640        | 8,290  |               |       | 8,950         | 6,530  | (17.6) |

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 1,900kg counter weight and 600mm(24") Triple grouser shoe with Dozer down.

| Lift point height<br>m (ft) |    | Lift-point radius |         |              |         |               |        |               |       | At max. reach |        |        |
|-----------------------------|----|-------------------|---------|--------------|---------|---------------|--------|---------------|-------|---------------|--------|--------|
|                             |    | 1.5m (4.9ft)      |         | 3.0m (9.8ft) |         | 4.5m (14.8ft) |        | 6.0m (19.7ft) |       | Capacity      |        | Reach  |
|                             |    |                   |         |              |         |               |        |               |       |               |        | m (ft) |
| 6.0m                        | kg |                   |         |              |         | *3,400        | *3,400 |               |       | *2,410        | *2,410 | 5.44   |
| 19.7ft                      | lb |                   |         |              |         | *7,500        | *7,500 |               |       | *5,310        | *5,310 | (17.8) |
| 4.5m                        | kg |                   |         |              |         | *3,660        | *3,660 | *3,430        | 2,790 | *2,220        | *2,220 | 6.41   |
| 14.8ft                      | lb |                   |         |              |         | *8,070        | *8,070 | *7,560        | 6,150 | *4,890        | *4,890 | (21.0) |
| 3.0m                        | kg |                   |         | *6,200       | *6,200  | *4,560        | 4,220  | *3,960        | 2,720 | *2,200        | 2,160  | 6.92   |
| 9.8ft                       | lb |                   |         | *13,670      | *13,670 | *10,050       | 9,300  | *8,730        | 6,000 | *4,850        | 4,760  | (22.7) |
| 1.5m                        | kg |                   |         | *7,380       | 7,260   | *5,680        | 3,960  | *4,440        | 2,620 | *2,310        | 2,040  | 7.07   |
| 4.9ft                       | lb |                   |         | *16,270      | 16,010  | *12,520       | 8,730  | *9,790        | 5,780 | *5,090        | 4,500  | (23.2) |
| 0.0m                        | kg |                   |         | *6,450       | *6,450  | *6,470        | 3,780  | *4,810        | 2,530 | *2,580        | 2,080  | 6.90   |
| 0.0ft                       | lb |                   |         | *14,220      | *14,220 | *14,260       | 8,330  | *10,600       | 5,580 | *5,690        | 4,590  | (22.6) |
| -1.5m                       | kg | *4,710            | *4,710  | *9,830       | 6,900   | *6,640        | 3,710  | *4,810        | 2,500 | *3,120        | 2,310  | 6.37   |
| -4.9ft                      | lb | *10,380           | *10,380 | *21,670      | 15,210  | *14,640       | 8,180  | *10,600       | 5,510 | *6,880        | 5,090  | (20.9) |
| -3.0m                       | kg | *8,770            | *8,770  | *8,860       | 7,010   | *5,960        | 3,760  |               |       | *4,460        | 2,960  | 5.38   |
| -9.8ft                      | lb | *19,330           | *19,330 | *19,530      | 15,450  | *13,140       | 8,290  |               |       | *9,830        | 6,530  | (17.6) |

- Lifting capacity are based on ISO 10567.
- Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
- (\*) indicates load limited by hydraulic capacity.















LIFTING CAPACITY











 Rating over-front     Rating over-side or 360 degree

HX140 L T3 MONO BOOM











4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe without Dozer.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 6.0m                        | kg |   |   |   |   | *3,400  | *3,400  |   |   | *2,420  | *2,420  | 5.42   |
| 19.7ft                      | lb |   |   |   |   | *7,500  | *7,500  |   |   | *5,340  | *5,340  | (17.8) |
| 4.5m                        | kg |   |   |   |   | *3,650  | *3,650  | *3,410  | 2,640   | *2,220  | *2,220  | 6.39   |
| 14.8ft                      | lb |   |   |   |   | *8,050  | *8,050  | *7,520  | 5,820   | *4,890  | *4,890  | (21.0) |
| 3.0m                        | kg |   |   | *6,150  | *6,150  | *4,540  | 3,990   | 3,870   | 2,570   | *2,200  | 2,050   | 6.91   |
| 9.8ft                       | lb |   |   | *13,560   | *13,560   | *10,010   | 8,800   | 8,530   | 5,670   | *4,850  | 4,520   | (22.7) |
| 1.5m                        | kg |   |   | *7,480  | 6,730   | *5,660  | 3,730   | 3,750   | 2,470   | *2,310  | 1,930   | 7.07   |
| 4.9ft                       | lb |   |   | *16,490   | 14,840  | *12,480   | 8,220   | 8,270   | 5,450   | *5,090  | 4,250   | (23.2) |
| 0.0m                        | kg |   |   | *6,420  | 6,410   | 5,630   | 3,550   | 3,660   | 2,380   | *2,570  | 1,960   | 6.91   |
| 0.0ft                       | lb |   |   | *14,150   | 14,130  | 12,410  | 7,830   | 8,070   | 5,250   | *5,670  | 4,320   | (22.7) |
| -1.5m                       | kg | *4,660  | *4,660  | *9,760  | 6,370   | 5,550   | 3,480   | 3,620   | 2,350   | *3,110  | 2,170   | 6.38   |
| -4.9ft                      | lb | *10,270   | *10,270   | *21,520   | 14,040  | 12,240  | 7,670   | 7,980   | 5,180   | *6,860  | 4,780   | (20.9) |
| -3.0m                       | kg | *8,690  | *8,690  | *8,890  | 6,480   | 5,600   | 3,520   |   |   | 4,280   | 2,770   | 5.40   |
| -9.8ft                      | lb | *19,160   | *19,160   | *19,600   | 14,290  | 12,350  | 7,760   |   |   | 9,440   | 6,110   | (17.7) |


4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe with Dozer up.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 6.0m                        | kg |   |   |   |   | *3,400  | *3,400  |   |   | *2,410  | *2,410  | 5.44   |
| 19.7ft                      | lb |   |   |   |   | *7,500  | *7,500  |   |   | *5,310  | *5,310  | (17.8) |
| 4.5m                        | kg |   |   |   |   | *3,660  | *3,660  | *3,430  | 2,990   | *2,220  | *2,220  | 6.41   |
| 14.8ft                      | lb |   |   |   |   | *8,070  | *8,070  | *7,560  | 6,590   | *4,890  | *4,890  | (21.0) |
| 3.0m                        | kg |   |   | *6,200  | *6,200  | *4,560  | 4,510   | 3,890   | 2,920   | *2,200  | *2,200  | 6.92   |
| 9.8ft                       | lb |   |   | *13,670   | *13,670   | *10,050   | 9,940   | 8,580   | 6,440   | *4,850  | *4,850  | (22.7) |
| 1.5m                        | kg |   |   | *7,380  | *7,380  | *5,680  | 4,250   | 3,780   | 2,810   | *2,310  | 2,210   | 7.07   |
| 4.9ft                       | lb |   |   | *16,270   | *16,270   | *12,520   | 9,370   | 8,330   | 6,190   | *5,090  | 4,870   | (23.2) |
| 0.0m                        | kg |   |   | *6,450  | *6,450  | 5,660   | 4,060   | 3,680   | 2,730   | *2,580  | 2,250   | 6.90   |
| 0.0ft                       | lb |   |   | *14,220   | *14,220   | 12,480  | 8,950   | 8,110   | 6,020   | *5,690  | 4,960   | (22.6) |
| -1.5m                       | kg | *4,710  | *4,710  | *9,830  | 7,410   | 5,590   | 4,000   | 3,650   | 2,700   | *3,120  | 2,490   | 6.37   |
| -4.9ft                      | lb | *10,380   | *10,380   | *21,670   | 16,340  | 12,320  | 8,820   | 8,050   | 5,950   | *6,880  | 5,490   | (20.9) |
| -3.0m                       | kg | *8,770  | *8,770  | *8,860  | 7,520   | 5,640   | 4,040   |   |   | 4,340   | 3,180   | 5.38   |
| -9.8ft                      | lb | *19,330   | *19,330   | *19,530   | 16,580  | 12,430  | 8,910   |   |   | 9,570   | 7,010   | (17.6) |

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe with Dozer down.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 6.0m                        | kg |   |   |   |   | *3,400  | *3,400  |   |   | *2,410  | *2,410  | 5.44   |
| 19.7ft                      | lb |   |   |   |   | *7,500  | *7,500  |   |   | *5,310  | *5,310  | (17.8) |
| 4.5m                        | kg |   |   |   |   | *3,660  | *3,660  | *3,430  | 2,990   | *2,220  | *2,220  | 6.41   |
| 14.8ft                      | lb |   |   |   |   | *8,070  | *8,070  | *7,560  | 6,590   | *4,890  | *4,890  | (21.0) |
| 3.0m                        | kg |   |   | *6,200  | *6,200  | *4,560  | 4,510   | *3,960  | 2,920   | *2,200  | *2,200  | 6.92   |
| 9.8ft                       | lb |   |   | *13,670   | *13,670   | *10,050   | 9,940   | *8,730  | 6,440   | *4,850  | *4,850  | (22.7) |
| 1.5m                        | kg |   |   | *7,380  | *7,380  | *5,680  | 4,250   | *4,440  | 2,810   | *2,310  | 2,210   | 7.07   |
| 4.9ft                       | lb |   |   | *16,270   | *16,270   | *12,520   | 9,370   | *9,790  | 6,190   | *5,090  | 4,870   | (23.2) |
| 0.0m                        | kg |   |   | *6,450  | *6,450  | *6,470  | 4,060   | *4,810  | 2,730   | *2,580  | 2,250   | 6.90   |
| 0.0ft                       | lb |   |   | *14,220   | *14,220   | *14,260   | 8,950   | *10,600   | 6,020   | *5,690  | 4,960   | (22.6) |
| -1.5m                       | kg | *4,710  | *4,710  | *9,830  | 7,410   | *6,640  | 4,000   | *4,810  | 2,700   | *3,120  | 2,490   | 6.37   |
| -4.9ft                      | lb | *10,380   | *10,380   | *21,670   | 16,340  | *14,640   | 8,820   | *10,600   | 5,950   | *6,880  | 5,490   | (20.9) |
| -3.0m                       | kg | *8,770  | *8,770  | *8,860  | 7,520   | *5,960  | 4,040   |   |   | *4,460  | 3,180   | 5.38   |
| -9.8ft                      | lb | *19,330   | *19,330   | *19,530   | 16,580  | *13,140   | 8,910   |   |   | *9,830  | 7,010   | (17.6) |











1. Lifting capacity are based on ISO 10567.
2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
4. (\*) indicates load limited by hydraulic capacity.















 Rating over-front     Rating over-side or 360 degree

HX140 L T3 MONO BOOM

4.60 m (15' 1") boom, 3.00 m (9' 10")arm equipped with 1,900kg counter weight and 600mm(24") Triple grouser shoe without Dozer.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | 7.5m (24.6ft)   |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   |   |   | 4.46   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   |   |   | (14.6) |
| 6.0m                        | kg |   |   |   |   |   |   | *2,050  | *2,050  |   |   | 6.01   |
| 19.7ft                      | lb |   |   |   |   |   |   | *4,520  | *4,520  |   |   | (19.7) |
| 4.5m                        | kg |   |   |   |   |   |   | *3,260  | 2,500   |   |   | 6.90   |
| 14.8ft                      | lb |   |   |   |   |   |   | *7,190  | 5,510   |   |   | (22.6) |
| 3.0m                        | kg |   |   |   |   | *4,050  | 3,790   | *3,630  | 2,420   |   |   | 7.38   |
| 9.8ft                       | lb |   |   |   |   | *8,930  | 8,360   | *8,000  | 5,340   |   |   | (24.2) |
| 1.5m                        | kg |   |   | *8,190  | 6,450   | *5,250  | 3,520   | 3,540   | 2,300   | *2,120  | 1,620   | 7.53   |
| 4.9ft                       | lb |   |   | *18,060   | 14,220  | *11,570   | 7,760   | 7,800   | 5,070   | *4,670  | 3,570   | (24.7) |
| 0.0m                        | kg |   |   | *7,160  | 5,980   | *5,300  | 3,300   | 3,420   | 2,190   |   |   | 7.38   |
| 0.0ft                       | lb |   |   | *15,790   | 13,180  | 11,680  | 7,280   | 7,540   | 4,830   |   |   | (24.2) |
| -1.5m                       | kg | *4,200  | *4,200  | *9,070  | 5,860   | 5,180   | 3,190   | 3,360   | 2,140   |   |   | 6.89   |
| -4.9ft                      | lb | *9,260  | *9,260  | *20,000   | 12,920  | 11,420  | 7,030   | 7,410   | 4,720   |   |   | (22.6) |
| -3.0m                       | kg | *7,300  | *7,300  | *9,470  | 5,910   | 5,180   | 3,190   |   |   | 3,400   | 2,170   | 5.99   |
| -9.8ft                      | lb | *16,090   | *16,090   | *20,880   | 13,030  | 11,420  | 7,030   |   |   | 7,500   | 4,780   | (19.7) |
| -4.5m                       | kg |   |   | *7,160  | 6,130   |   |   |   |   | *4,500  | 3,430   | 4.43   |
| -14.8ft                     | lb |   |   | *15,790   | 13,510  |   |   |   |   | *9,920  | 7,560   | (14.5) |

4.60 m (15' 1") boom, 3.00 m (9' 10")arm equipped with 1,900kg counter weight and 600mm(24") Triple grouser shoe with Dozer up.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | 7.5m (24.6ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   |   |   | *2,420  | *2,420  | 4.49   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   |   |   | *5,340  | *5,340  | (14.7) |
| 6.0m                        | kg |   |   |   |   |   |   | *2,100  | *2,100  |   |   | *2,020  | *2,020  | 6.03   |
| 19.7ft                      | lb |   |   |   |   |   |   | *4,630  | *4,630  |   |   | *4,450  | *4,450  | (19.8) |
| 4.5m                        | kg |   |   |   |   |   |   | *3,260  | 2,840   |   |   | *1,890  | *1,890  | 6.91   |
| 14.8ft                      | lb |   |   |   |   |   |   | *7,190  | 6,260   |   |   | *4,170  | *4,170  | (22.7) |
| 3.0m                        | kg |   |   |   |   | *4,060  | *4,060  | *3,640  | 2,760   |   |   | *1,880  | *1,880  | 7.39   |
| 9.8ft                       | lb |   |   |   |   | *8,950  | *8,950  | *8,020  | 6,080   |   |   | *4,140  | *4,140  | (24.2) |
| 1.5m                        | kg |   |   | *8,230  | 7,470   | *5,270  | 4,030   | 3,560   | 2,640   | *2,120  | 1,870   | *1,970  | 1,860   | 7.53   |
| 4.9ft                       | lb |   |   | *18,140   | 16,470  | *11,620   | 8,880   | 7,850   | 5,820   | *4,670  | 4,120   | *4,340  | 4,100   | (24.7) |
| 0.0m                        | kg |   |   | *7,170  | 6,990   | 5,340   | 3,800   | 3,450   | 2,530   |   |   | *2,170  | 1,880   | 7.37   |
| 0.0ft                       | lb |   |   | *15,810   | 15,410  | 11,770  | 8,380   | 7,610   | 5,580   |   |   | *4,780  | 4,140   | (24.2) |
| -1.5m                       | kg | *4,240  | *4,240  | *9,110  | 6,860   | 5,220   | 3,700   | 3,390   | 2,470   |   |   | *2,580  | 2,060   | 6.88   |
| -4.9ft                      | lb | *9,350  | *9,350  | *20,080   | 15,120  | 11,510  | 8,160   | 7,470   | 5,450   |   |   | *5,690  | 4,540   | (22.6) |
| -3.0m                       | kg | *7,360  | *7,360  | *9,450  | 6,920   | 5,220   | 3,700   |   |   |   |   | 3,440   | 2,520   | 5.97   |
| -9.8ft                      | lb | *16,230   | *16,230   | *20,830   | 15,260  | 11,510  | 8,160   |   |   |   |   | 7,580   | 5,560   | (19.6) |
| -4.5m                       | kg |   |   | *7,110  | *7,110  |   |   |   |   |   |   | *4,500  | 4,000   | 4.40   |
| -14.8ft                     | lb |   |   | *15,670   | *15,670   |   |   |   |   |   |   | *9,920  | 8,820   | (14.4) |















LIFTING CAPACITY













 Rating over-front     Rating over-side or 360 degree

HX140 L T3 MONO BOOM













4.60 m (15' 1") boom, 3.00 m (9' 10")arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe without Dozer.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | 7.5m (24.6ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   |   |   | *2,440  | *2,440  | 4.46   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   |   |   | *5,380  | *5,380  | (14.6) |
| 6.0m                        | kg |   |   |   |   |   |   | *2,050  | *2,050  |   |   | *2,020  | *2,020  | 6.01   |
| 19.7ft                      | lb |   |   |   |   |   |   | *4,520  | *4,520  |   |   | *4,450  | *4,450  | (19.7) |
| 4.5m                        | kg |   |   |   |   |   |   | *3,260  | 2,690   |   |   | *1,890  | *1,890  | 6.90   |
| 14.8ft                      | lb |   |   |   |   |   |   | *7,190  | 5,930   |   |   | *4,170  | *4,170  | (22.6) |
| 3.0m                        | kg |   |   |   |   | *4,050  | *4,050  | *3,630  | 2,610   |   |   | *1,880  | 1,860   | 7.38   |
| 9.8ft                       | lb |   |   |   |   | *8,930  | *8,930  | *8,000  | 5,750   |   |   | *4,140  | 4,100   | (24.2) |
| 1.5m                        | kg |   |   | *8,190  | 6,930   | *5,250  | 3,790   | 3,780   | 2,490   | *2120   | 1,770   | *1,960  | 1,750   | 7.53   |
| 4.9ft                       | lb |   |   | *18,060   | 15,280  | *11,570   | 8,360   | 8,330   | 5,490   | *4670   | 3,900   | *4,320  | 3,860   | (24.7) |
| 0.0m                        | kg |   |   | *7,160  | 6,470   | 5,660   | 3,570   | 3,660   | 2,380   |   |   | *2,170  | 1,770   | 7.38   |
| 0.0ft                       | lb |   |   | *15,790   | 14,260  | 12,480  | 7,870   | 8,070   | 5,250   |   |   | *4,780  | 3,900   | (24.2) |
| -1.5m                       | kg | *4,200  | *4,200  | *9,070  | 6,340   | 5,540   | 3,460   | 3,600   | 2,330   |   |   | *2,570  | 1,930   | 6.89   |
| -4.9ft                      | lb | *9,260  | *9,260  | *20,000   | 13,980  | 12,210  | 7,630   | 7,940   | 5,140   |   |   | *5,670  | 4,250   | (22.6) |
| -3.0m                       | kg | *7,300  | *7,300  | *9,470  | 6,400   | 5,540   | 3,470   |   |   |   |   | *3,460  | 2,360   | 5.99   |
| -9.8ft                      | lb | *16,090   | *16,090   | *20,880   | 14,110  | 12,210  | 7,650   |   |   |   |   | *7,630  | 5,200   | (19.7) |
| -4.5m                       | kg |   |   | *7,160  | 6,620   |   |   |   |   |   |   | *4,500  | 3,710   | 4.43   |
| -14.8ft                     | lb |   |   | *15,790   | 14,590  |   |   |   |   |   |   | *9,920  | 8,180   | (14.5) |


4.60 m (15' 1") boom, 3.00 m (9' 10")arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe with Dozer up.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | 7.5m (24.6ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   |   |   | *2,420  | *2,420  | 4.49   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   |   |   | *5,340  | *5,340  | (14.7) |
| 6.0m                        | kg |   |   |   |   |   |   | *2,100  | *2,100  |   |   | *2,020  | *2,020  | 6.03   |
| 19.7ft                      | lb |   |   |   |   |   |   | *4,630  | *4,630  |   |   | *4,450  | *4,450  | (19.8) |
| 4.5m                        | kg |   |   |   |   |   |   | *3,260  | 3,040   |   |   | *1,890  | *1,890  | 6.91   |
| 14.8ft                      | lb |   |   |   |   |   |   | *7,190  | 6,700   |   |   | *4,170  | *4,170  | (22.7) |
| 3.0m                        | kg |   |   |   |   | *4,060  | *4,060  | *3,640  | 2,950   |   |   | *1,880  | *1,880  | 7.39   |
| 9.8ft                       | lb |   |   |   |   | *8,950  | *8,950  | *8,020  | 6,500   |   |   | *4,140  | *4,140  | (24.2) |
| 1.5m                        | kg |   |   | *8,230  | 7,980   | *5,270  | 4,310   | 3,800   | 2,830   | *2120   | 2,020   | *1,970  | *1,970  | 7.53   |
| 4.9ft                       | lb |   |   | *18,140   | 17,590  | *11,620   | 9,500   | 8,380   | 6,240   | *4670   | 4,450   | *4,340  | *4,340  | (24.7) |
| 0.0m                        | kg |   |   | *7,170  | *7,170  | 5,690   | 4,090   | 3,690   | 2,730   |   |   | *2,170  | 2,040   | 7.37   |
| 0.0ft                       | lb |   |   | *15,810   | *15,810   | 12,540  | 9,020   | 8,140   | 6,020   |   |   | *4,780  | 4,500   | (24.2) |
| -1.5m                       | kg | *4,240  | *4,240  | *9,110  | 7,380   | 5,570   | 3,980   | 3,620   | 2,670   |   |   | *2,580  | 2,220   | 6.88   |
| -4.9ft                      | lb | *9,350  | *9,350  | *20,080   | 16,270  | 12,280  | 8,770   | 7,980   | 5,890   |   |   | *5,690  | 4,890   | (22.6) |
| -3.0m                       | kg | *7,360  | *7,360  | *9,450  | 7,440   | 5,580   | 3,990   |   |   |   |   | *3,480  | 2,720   | 5.97   |
| -9.8ft                      | lb | *16,230   | *16,230   | *20,830   | 16,400  | 12,300  | 8,800   |   |   |   |   | *7,670  | 6,000   | (19.6) |
| -4.5m                       | kg |   |   | *7,110  | *7,110  |   |   |   |   |   |   | *4,500  | 4,290   | 4.40   |
| -14.8ft                     | lb |   |   | *15,670   | *15,670   |   |   |   |   |   |   | *9,920  | 9,460   | (14.4) |

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 2,300kg counter weight and 600mm(24") Triple grouser shoe with Dozer down.

| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | 7.5m (24.6ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   |   |   | *2,420  | *2,420  | 4.49   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   |   |   | *5,340  | *5,340  | (14.7) |
| 6.0m                        | kg |   |   |   |   |   |   | *2,100  | *2,100  |   |   | *2,020  | *2,020  | 6.03   |
| 19.7ft                      | lb |   |   |   |   |   |   | *4,630  | *4,630  |   |   | *4,450  | *4,450  | (19.8) |
| 4.5m                        | kg |   |   |   |   |   |   | *3,260  | 3,040   |   |   | *1,890  | *1,890  | 6.91   |
| 14.8ft                      | lb |   |   |   |   |   |   | *7,190  | 6,700   |   |   | *4,170  | *4,170  | (22.7) |
| 3.0m                        | kg |   |   |   |   | *4,060  | *4,060  | *3,640  | 2,950   |   |   | *1,880  | *1,880  | 7.39   |
| 9.8ft                       | lb |   |   |   |   | *8,950  | *8,950  | *8,020  | 6,500   |   |   | *4,140  | *4,140  | (24.2) |
| 1.5m                        | kg |   |   | *8,230  | 7,980   | *5,270  | 4,310   | 4,180   | 2,830   | *2,120  | 2,020   | *1,970  | *1,970  | 7.53   |
| 4.9ft                       | lb |   |   | *18,140   | 17,590  | *11,620   | 9,500   | *9,220  | 6,240   | *4,670  | 4,450   | *4,340  | *4,340  | (24.7) |
| 0.0m                        | kg |   |   | *7,170  | *7,170  | *6,240  | 4,090   | *4,660  | 2,730   |   |   | *2,170  | 2,040   | 7.37   |
| 0.0ft                       | lb |   |   | *15,810   | *15,810   | *13,760   | 9,020   | *10,270   | 6,020   |   |   | *4,780  | 4,500   | (24.2) |
| -1.5m                       | kg | *4,240  | *4,240  | *9,110  | 7,380   | *6,630  | 3,980   | *4,850  | 2,670   |   |   | *2,580  | 2,220   | 6.88   |
| -4.9ft                      | lb | *9,350  | *9,350  | *20,080   | 16,270  | *14,620   | 8,770   | *10,690   | 5,890   |   |   | *5,690  | 4,890   | (22.6) |
| -3.0m                       | kg | *7,360  | *7,360  | *9,450  | 7,440   | *6,290  | 3,990   |   |   |   |   | *3,480  | 2,720   | 5.97   |
| -9.8ft                      | lb | *16,230   | *16,230   | *20,830   | 16,400  | *13,870   | 8,800   |   |   |   |   | *7,670  | 6,000   | (19.6) |
| -4.5m                       | kg |   |   | *7,110  | *7,110  |   |   |   |   |   |   | *4,500  | 4,290   | 4.40   |
| -14.8ft                     | lb |   |   | *15,670   | *15,670   |   |   |   |   |   |   | *9,920  | 9,460   | (14.4) |











1. Lifting capacity are based on ISO 10567.
2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
4. (\*) indicates load limited by hydraulic capacity.



 Rating over-front     Rating over-side or 360 degree



HX140 HW MONO BOOM











4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 1,900kg counter weight and 800mm(32") Triple grouser shoe without Dozer.











| Lift point height<br>m (ft) |    | Lift-point radius   |   |   |   |   |   |   |   | At max. reach   |   |        |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
|                             |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |   | Capacity  |   | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5m                        | kg |   |   |   |   |   |   |   |   | *2,850  | *2,850  | 4.13   |
| 24.6ft                      | lb |   |   |   |   |   |   |   |   | *6,280  | *6,280  | (13.5) |
| 6.0m                        | kg |   |   |   |   | *3,380  | *3,380  |   |   | *2,350  | *2,350  | 5.68   |
| 19.7ft                      | lb |   |   |   |   | *7,450  | *7,450  |   |   | *5,180  | *5,180  | (18.6) |
| 4.5m                        | kg |   |   |   |   | *3,800  | *3,800  | *3,690  | 3,070   | *2,210  | *2,210  | 6.54   |
| 14.8ft                      | lb |   |   |   |   | *8,380  | *8,380  | *8,140  | 6,770   | *4,870  | *4,870  | (21.5) |
| 3.0m                        | kg |   |   | *6,850  | *6,850  | *4,790  | 4,570   | *4,050  | 2,990   | *2,220  | *2,220  | 6.98   |
| 9.8ft                       | lb |   |   | *15,100   | *15,100   | *10,560   | 10,080  | *8,930  | 6,590   | *4,890  | *4,890  | (22.9) |
| 1.5m                        | kg |   |   | *6,410  | *6,410  | *5,880  | 4,320   | 4,340   | 2,880   | *2,350  | 2,280   | 7.07   |
| 4.9ft                       | lb |   |   | *14,130   | *14,130   | *12,960   | 9,520   | 9,570   | 6,350   | *5,180  | 5,030   | (23.2) |
| 0.0m                        | kg |   |   | *6,910  | *6,910  | 6,520   | 4,160   | 4,250   | 2,800   | *2,660  | 2,360   | 6.83   |
| 0.0ft                       | lb |   |   | *15,230   | *15,230   | 14,370  | 9,170   | 9,370   | 6,170   | *5,860  | 5,200   | (22.4) |
| -1.5m                       | kg | *5,440  | *5,440  | *9,930  | 7,590   | 6,470   | 4,120   | 4,240   | 2,790   | *3,300  | 2,670   | 6.21   |
| -4.9ft                      | lb | *11,990   | *11,990   | *21,890   | 16,730  | 14,260  | 9,080   | 9,350   | 6,150   | *7,280  | 5,890   | (20.4) |
| -3.0m                       | kg | *9,840  | *9,840  | *8,440  | 7,730   | *5,640  | 4,190   |   |   | *4,650  | 3,550   | 5.10   |
| -9.8ft                      | lb | *21,690   | *21,690   | *18610  | 17,040  | *12,430   | 9,240   |   |   | *10,250   | 7,830   | (16.7) |




LIFTING CAPACITY

 Rating over-front    Rating over-side or 360 degree

| HX140 HW MONO BOOM  |    |   |   |   |   |   |   |   |  |   |   |
|---|----|---|---|---|---|---|---|---|--|---|---|
| 4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,300kg counter weight and 800mm(32") Triple grouser shoe without Dozer. |    |   |   |   |   |   |   |   |  |   |   |
| Lift point height<br>m (ft)   |    | Lift-point radius   |   |   |   |   |   |   |  | At max. reach   |   |
|   |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |  | Capacity  |   |
|   |    |  |  |  |  |  |  |  |  |  |  |
|   |    |   |   |   |   |   |   |   |  |   |   |
|   |    |   |   |   |   |   |   |   |  | m (ft)  |   |
| 7.5m  | kg |   |   |   |   |   |   |   |  | *2,850  | *2,850  |
| 24.6ft  | lb |   |   |   |   |   |   |   |  | *6,280  | *6,280  |
| 6.0m  | kg |   |   |   |   | *3,380  | *3,380  |   |  | *2,350  | *2,350  |
| 19.7ft  | lb |   |   |   |   | *7,450  | *7,450  |   |  | *5,180  | *5,180  |
| 4.5m  | kg |   |   |   |   | *3,800  | *3,800  | *3,690  | 3,270  | *2,210  | *2,210  |
| 14.8ft  | lb |   |   |   |   | *8,380  | *8,380  | *8,140  | 7,210  | *4,870  | *4,870  |
| 3.0m  | kg |   |   | *6,850  | *6,850  | *4,790  | *4,790  | *4,050  | 3,180  | *2,220  | *2,220  |
| 9.8ft   | lb |   |   | *15,100   | *15,100   | *10,560   | *10,560   | *8,930  | 7,010  | *4,890  | *4,890  |
| 1.5m  | kg |   |   | *6,410  | *6,410  | *5,880  | 4,600   | *4,530  | 3,080  | *2,350  | *2,350  |
| 4.9ft   | lb |   |   | *14,130   | *14,130   | *12,960   | 10,140  | *9,990  | 6,790  | *5,180  | *5,180  |
| 0.0m  | kg |   |   | *6,910  | *6,910  | *6,560  | 4,440   | 4,490   | 3,000  | *2,660  | 2,520   |
| 0.0ft   | lb |   |   | *15,230   | *15,230   | *14,460   | 9,790   | 9,900   | 6,610  | *5,860  | 5,560   |
| -1.5m   | kg | *5,440  | *5,440  | *9,930  | 8,100   | *6,590  | 4,400   | 4,480   | 2,990  | *3,300  | 2,860   |
| -4.9ft  | lb | *11,990   | *11,990   | *21,890   | 17,860  | *14,530   | 9,700   | 9,880   | 6,590  | *7,280  | 6,310   |
| -3.0m   | kg | *9,840  | *9,840  | *8,440  | 8,240   | *5,640  | 4,470   |   |  | *4,650  | 3,790   |
| -9.8ft  | lb | *21,690   | *21,690   | *18,610   | 18,170  | *12,430   | 9,850   |   |  | *10,250   | 8,360   |


| 4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 2,300kg counter weight and 800mm(32") Triple grouser shoe without Dozer. |    |   |   |   |   |   |   |   |  |   |   |
|--|----|---|---|---|---|---|---|---|--|---|---|
| Lift point height<br>m (ft)  |    | Lift-point radius   |   |   |   |   |   |   |  | At max. reach   |   |
|  |    | 1.5m (4.9ft)  |   | 3.0m (9.8ft)  |   | 4.5m (14.8ft)   |   | 6.0m (19.7ft)   |  | 7.5m (24.6ft)   |   |
|  |    |  |  |  |  |  |  |  |  |  |  |
|  |    |   |   |   |   |   |   |   |  |   |   |
|  |    |   |   |   |   |   |   |   |  | m (ft)  |   |
| 7.5m   | kg |   |   |   |   |   |   |   |  | *2,300  | *2,300  |
| 24.6ft   | lb |   |   |   |   |   |   |   |  | *5,070  | *5,070  |
| 6.0m   | kg |   |   |   |   |   |   | *2,550  | *2,550   |   |   |
| 19.7ft   | lb |   |   |   |   |   |   | *5,620  | *5,620   |   |   |
| 4.5m   | kg |   |   |   |   |   |   | *3,320  | 3,310  |   |   |
| 14.8ft   | lb |   |   |   |   |   |   | *7,320  | 7,300  |   |   |
| 3.0m   | kg |   |   | *5,730  | *5,730  | *4,300  | *4,300  | *3,740  | 3,210  |   |   |
| 9.8ft  | lb |   |   | *12,630   | *12,630   | *9,480  | *9,480  | *8,250  | 7,080  |   |   |
| 1.5m   | kg |   |   | *8,740  | 8,510   | *5,500  | 4,660   | *4,290  | 3,090  | *2,130  | *2,130  |
| 4.9ft  | lb |   |   | *19,270   | 18,760  | *12,130   | 10,270  | *9,460  | 6,810  | *4,700  | *4,700  |
| 0.0m   | kg |   |   | *7,310  | *7310   | *6,370  | 4,460   | 4,490   | 3,000  |   |   |
| 0.0ft  | lb |   |   | *16,120   | *16120  | *14,040   | 9,830   | 9,900   | 6,610  |   |   |
| -1.5m  | kg | *4,800  | *4,800  | *9,850  | 8,050   | *6,630  | 4,370   | 4,440   | 2,950  |   |   |
| -4.9ft   | lb | *10,580   | *10,580   | *21,720   | 17,750  | *14,620   | 9,630   | 9,790   | 6,500  |   |   |
| -3.0m  | kg | *8,160  | *8,160  | *9,140  | 8,140   | *6,090  | 4,400   |   |  | *3,810  | 3,190   |
| -9.8ft   | lb | *17,990   | *17,990   | *20,150   | 17,950  | *13,430   | 9,700   |   |  | *8,400  | 7,030   |


1. Lifting capacity are based on ISO 10567.
2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
4. (\*) indicates load limited by hydraulic capacity.




BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS







SAE heaped  
m³ (yd³)

\*0.52 (0.68)  
0.58 (0.76)

0.65 (0.85)

0.71 (0.93)

| Capacity<br>m³ (yd³) |                | Width<br>mm (in)        |                      | Weight<br>kg (lb) | Tooth<br>(EA) | Recommendation mm (ft.in) |                       |                      |                       |
|----------------------|----------------|-------------------------|----------------------|-------------------|---------------|---------------------------|-----------------------|----------------------|-----------------------|
|                      |                |                         |                      |                   |               | 4,600 (15' 1") Boom       |                       |                      |                       |
|                      |                |                         |                      |                   |               | 1,900 kg CWT              |                       | 2,300 kg CWT         |                       |
|                      |                |                         |                      |                   |               | 2,500 (8' 2")<br>Arm      | 3,000 (9' 10")<br>Arm | 2,500 (8' 2")<br>Arm | 3,000 (9' 10")<br>Arm |
| SAE<br>Heaped        | CECE<br>Heaped | Without<br>Side Cutters | With<br>Side Cutters |                   |               |                           |                       |                      |                       |
| *0.52 (0.68)         | 0.35 (0.46)    | 915 (36.0")             | 1,015 (40.0")        | 461 (1,020)       | 5             | ●                         | ●                     | ●                    | ●                     |
| 0.58 (0.76)          | 0.50 (0.65)    | 1,000 (39.4")           | 1,100 (43.3")        | 484 (1,070)       | 5             | ●                         | ⦿                     | ●                    | ●                     |
| 0.65 (0.85)          | 0.40 (0.52)    | 1,105 (43.5")           | 1,205 (47.4")        | 513 (1,130)       | 5             | ⦿                         | ■                     | ●                    | ⦿                     |
| 0.71 (0.93)          | 0.60 (0.78)    | 1,190 (46.9")           | 1,290 (50.8")        | 536 (1,180)       | 5             | ■                         | ■                     | ⦿                    | ■                     |

\*Standard bucket

●

 : Applicable for materials with density of 2,100 kgf/m³ (3,500 lbf/yd³) or less  

⦿

 : Applicable for materials with density of 1,800 kgf/m³ (3,000 lbf/yd³) or less  

■

 : Applicable for materials with density of 1,500 kgf/m³ (2,500 lbf/yd³) or less  

▲

 : Applicable for materials with density of 1,200 kgf/m³ (2,000 lbf/yd³) or less  
x : Not Recommended

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design.  
4.60 m boom and 2.5 m, 3.0 m arms are available.

| DIGGING FORCE        |        |            |                 |                 |                 |
|----------------------|--------|------------|-----------------|-----------------|-----------------|
| Boom                 | Length | mm (ft.in) | 4,600 (15' 1")  |                 | Remark          |
|                      | Weight | kg (lb)    | 812 (1,790)     |                 |                 |
| Arm                  | Length | mm (ft.in) | 2,500 (8' 2")   | 3,000 (9' 12")  |                 |
|                      | Weight | kg (lb)    | 445 (980)       | 482 (1,060)     |                 |
| Bucket Digging Force | SAE    | kN         | 88 [95]         | 88 [95]         | []: Power Boost |
|                      |        | kgf        | 8,960 [9,730]   | 8,956 [9,720]   |                 |
|                      |        | lbf        | 19,754 [21,451] | 19,745 [21,429] |                 |
|                      | ISO    | kN         | 103 [112]       | 103 [112]       |                 |
|                      |        | kgf        | 10,494 [11,390] | 10,489 [11,390] |                 |
|                      |        | lbf        | 23,134 [25,111] | 23,123 [25,111] |                 |
| Arm Crowd Force      | SAE    | kN         | 63 [68]         | 56 [61]         |                 |
|                      |        | kgf        | 6,396 [6,940]   | 5,711 [6,200]   |                 |
|                      |        | lbf        | 14,100 [15,300] | 12,591 [13,669] |                 |
|                      | ISO    | kN         | 65 [71]         | 58 [63]         |                 |
|                      |        | kgf        | 6,666 [7,240]   | 5,925 [6,430]   |                 |
|                      |        | lbf        | 14,696 [15,961] | 13,062 [14,176] |                 |

Note : Boom weight includes arm cylinder, piping, and pin  
Arm weight includes bucket cylinder, linkage, and pin



STANDARD / OPTION

| ENGINE   |                   | STD | OPT |
|--|-------------------|-----|-----|
| Cummins QSB4.5   |                   |     |     |
| Engine Auto Idle   |                   | ●   |     |
| Engine Auto Shutdown Control                                 |                   |     | ●   |
| Emergency Engine Stop Switch                                 |                   | ●   |     |
| HYDRAULIC SYSTEM   |                   |     |     |
| INTELLIGENT POWER CONTROL (IPC) UPGRADE                      |                   |     |     |
| 3-Power Mode, 2-Work Mode, User Mode                         |                   | ●   |     |
| Variable Power Control                                       |                   | ●   |     |
| Pump Flow Control  |                   | ●   |     |
| Attachment Mode Flow Control                                 |                   |     | ●   |
| CAB & INTERIOR   |                   |     |     |
| ISO STANDARD CABIN   |                   |     |     |
| Rise-Up Type Windshield Wiper                                |                   | ●   |     |
| Radio / USB Player   |                   | ●   |     |
| 12V Power Outlet (24V DC to 12V DC converter)                |                   | ●   |     |
| Electric Horn  |                   | ●   |     |
| All-Weather Steel Cab with 360°Visibility                    |                   | ●   |     |
| Safety glass - Tempered glass                                |                   | ●   |     |
| Safety glass - Tempered glass with front laminated glass     |                   |     | ●   |
| Sliding Fold-In Front Window                                 |                   | ●   |     |
| Sliding Side Window (LH)                                     |                   | ●   |     |
| Lockable Door  |                   | ●   |     |
| Hot & Cool Box   |                   | ●   |     |
| Storage Compartment & Ashtray                                |                   | ●   |     |
| Sun Visor  |                   | ●   |     |
| Door And Cab Locks, One Key                                  |                   | ●   |     |
| Cabin Lights   |                   |     | ●   |
| Cabin Front Window Rain Guard                                |                   |     | ●   |
| Transparent Cabin Roof-Cover                                 |                   | ●   |     |
| Cabin Roof-Steel Cover                                       |                   |     | ●   |
| Pilot-Operated Slidable Joystick                             |                   | ●   |     |
| AUTOMATIC CLIMATE CONTROL                                    |                   |     |     |
| Air conditioner & heater                                     |                   | ●   |     |
| Defroster  |                   | ●   |     |
| Starting Aid (air grid heater) for cold weather              |                   | ●   |     |
| CENTRALIZED MONITORING                                       |                   |     |     |
| 8" LCD Display - Normal type                                 |                   | ●   |     |
| 8" LCD Display - Premium type                                |                   |     | ●   |
| Engine Speed or Trip Meter / Accel.                          |                   | ●   |     |
| Engine Coolant Temperature Gauge                             |                   | ●   |     |
| Max Power  |                   | ●   |     |
| Low Speed / High Speed                                       |                   | ●   |     |
| Auto Idle  |                   | ●   |     |
| Overload warning with alarm                                  |                   |     | ●   |
| Air Cleaner Clogging   |                   | ●   |     |
| Indicators   |                   | ●   |     |
| ECO Gauges   |                   | ●   |     |
| Fuel Level Gauge   |                   | ●   |     |
| Hyd. Oil Temperature Gauge                                   |                   | ●   |     |
| Fuel Warmer  |                   | ●   |     |
| Warnings   |                   | ●   |     |
| Communication Error  |                   | ●   |     |
| Low Battery  |                   | ●   |     |
| Clock  |                   | ●   |     |
| SEAT   |                   |     |     |
| Mechanical suspension without heater                         |                   |     | ●   |
| Mechanical suspension with heater                            |                   | ●   |     |
| Adjustable air suspension without heater                     |                   |     | ●   |
| Adjustable air suspension with heater                        |                   |     | ●   |
| CABIN FOPS (ISO 10262) LEVEL 2                               |                   |     |     |
| FOPS (Falling Object Protective Structure)-ISO 10262 Level 2 | Front & Top guard |     | ●   |
|  | Top guard         |     | ●   |
| CABIN ROPS   |                   |     |     |
| ROPS (Roll Over Protective Structures)ISO 12117-2            |                   |     | ●   |

| SAFETY   | STD | OPT |
|--|-----|-----|
| Battery Master Switch  | ●   |     |
| Rear View Camera   |     | ●   |
| Rear & Mirror View Camera  |     | ●   |
| AAVM (Advanced Around View Monitoring)                               |     | ●   |
| Four Front Working Lights<br>(2 Boom Mounted, 2 Front Frame Mounted) | ●   |     |
| Travel Alarm   | ●   |     |
| Rear Work Lamp   |     | ●   |
| Beacon Lamp  |     | ●   |
| Automatic Swing Brake  | ●   |     |
| Boom Holding System  | ●   |     |
| Arm Holding System   | ●   |     |
| Safety Lock Valve For Boom Cylinder With<br>Overload Warning Device  |     | ●   |
| Safety Lock Valve For Arm Cylinder                                   |     | ●   |
| Swing Lock System  |     | ●   |
| Three Outside Rearview Mirror  | ●   |     |
| General Type Guardrail   | ●   |     |
| Guardrail - Boxing Ring  |     | ●   |
| ATTACHMENT   |     |     |
| BOOMS  |     |     |
| 4.60m, 15' 1" Mono   | ●   |     |
| ARMS   |     |     |
| 2.50m, 8' 2"   | ●   |     |
| 3.00m, 9' 10"  |     | ●   |
| OTHERS   |     |     |
| Fuel Pre-Filter (w/o Warmer)   |     | ●   |
| Fuel Pre-Filter (with Single Warmer)                                 |     | ●   |
| Fuel Pre-Filter (with Dual Warmer)                                   |     | ●   |
| Pre-Cleaner  |     | ●   |
| Self-Diagnostics System  | ●   |     |
| Hi MATE (Remote Management System)                                   |     | ●   |
| Batteries (2 × 12 V × 100 AH)  | ●   |     |
| Fuel Filler Pump (35 lpm)  |     | ●   |
| Single-Acting Piping Kit (Breaker, Etc.)                             |     | ●   |
| Double-Acting Piping Kit (Clamshell, Etc.)                           |     | ●   |
| Proportional Auxiliary Hydraulic System                              |     | ●   |
| Rotating Piping Kit  |     | ●   |
| Quick Coupler Piping   |     | ●   |
| Quick Coupler  |     | ●   |
| Accumulator For Lowering Work Equipment                              | ●   |     |
| Pattern Change Valve (2 Patterns)                                    |     | ●   |
| Fine (Cushion) Swing Control   |     | ●   |
| Tool Kit   |     | ●   |
| COUNTERWEIGHT  |     |     |
| Lower Frame Under Cover  | ●   |     |
| Dozer Blade  |     | ●   |
| UNDERCARRIAGE  |     |     |
| Lower frame under cover  | ●   |     |
| Dozer Blade  |     | ●   |
| TRACK SHOES  |     |     |
| Triple Grousers Shoes (500 mm, 20")                                  |     | ●   |
| Triple Grousers Shoes (600 mm, 24")                                  | ●   |     |
| Triple Grousers Shoe (700 mm, 28")                                   |     | ●   |
| Triple Grousers Shoe (700 mm, 28") - H/C Frame                       |     | ●   |
| Triple Grousers Shoe (800 mm, 32") - H/C Frame                       |     | ●   |
| Track Guard  | ●   |     |
| Full Track Guard - H/C Frame   |     | ●   |

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.  
The machine may vary according to International standards.  
\* The photos may include attachments and optional equipment that are not available in your area.  
\* Materials and specifications are subject to change without advance notice.  
\* All imperial measurements rounded off to the nearest pound or inch.

MEMO